


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 21 TOWNSHIP 17 RANGE 5
DATE: 8-18-06
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 1-19-00

IN. S.P.C. E ZONE NAD '83
NAME: 17052104
N: 517067.9934(m)
E: 73537.5814(m)

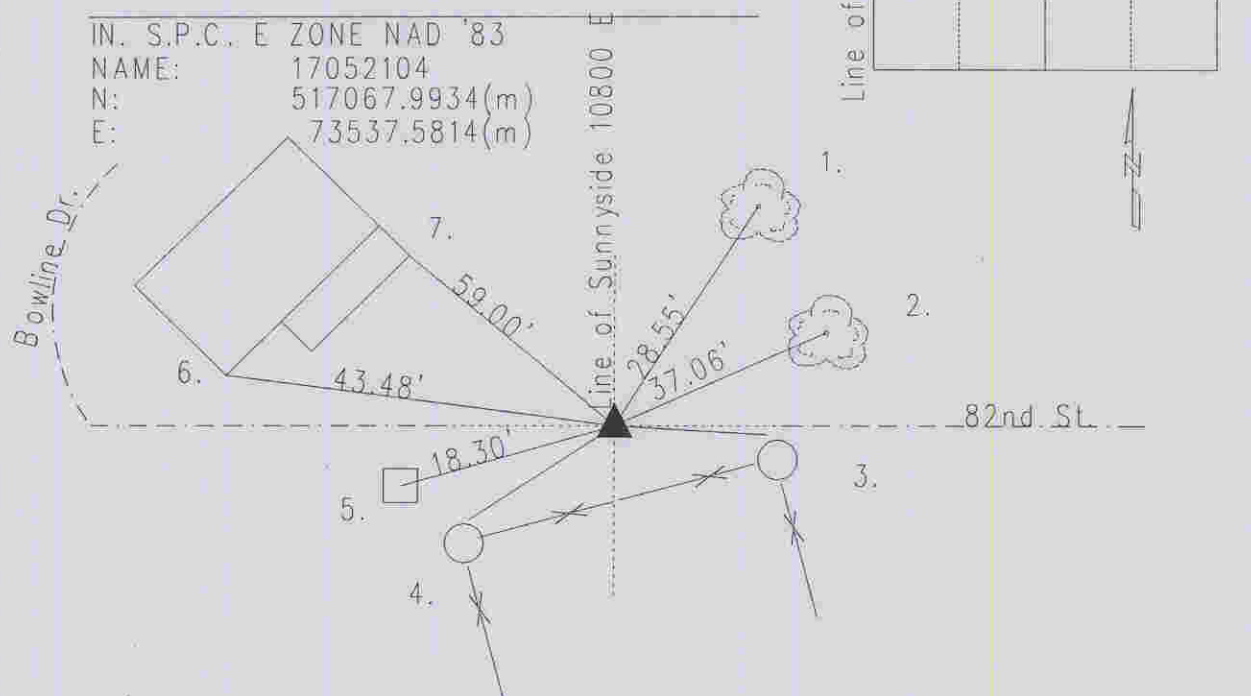

Original post set 1821 by Wm. B. Laughlin with witness: 4" ironwood N 8 W 12 links; 18" beech S 30 E 28 links. Legal Survey 8-1854 by Alexander Wilson per Lawrence Township Legal Survey Book pg.10 labels corner 'b' and calls it a stone. No witness was given. Legal Survey 10-1874 by O.W. Voorhis per Lawrence Township Legal Survey Book pg. 35 labels the corner 'j' and indicates it as being 'found rock set by different surveyor (sic)'. April 12, 1978 Wilcoxen calls the corner a PK nail in stone. These ties were a result of 1974 ties provided by Cripe Engineering Co. 1978 ties were redrawn 3-5-82. This corner was excavated 7-6-1982 by Cleveland. The stone was fd approx. flush with the ground surface and a masonry nail was fd in the stone. The stone was approx. 18" in diameter by 24" length. Weighs 200 lbs. Stone removed Harrison set. Re-tied 1-19-00. Re-tied 8-18-06 by Kiste.

REF.	DISTANCE	DESCRIPTION
1.	28.55'	Mag nail w/washer F spur root 14" maple
2.	37.06'	Mag nail w/washer S 24" twin cherry 12"up
3.	13.46'	Face of steel post for dog kennel
4.	5.00'	Face of steel post for dog kennel
5.	18.30'	MCSO sign post
6.	43.48'	Southerly corner 2 story brick address 8179
7.	59.00'	Northeasterly corner of wooden deck